



LPS-150TD

说明书 Instruction Manual

感谢您选购锐鹰公司的产品!

如欲了解更多相关产品的信息, 请联系您当地的经销商或访问我们的网页。

使用产品之前, 请先仔细阅读说明书。

Thank you for purchasing FalconEyes' products.

For further details of our related products, please contact your local distributor or visit our webpage at www.falconeyes.com.hk

Thank you.

Please read this manual carefully before using this product.

E-mail: info@falconeyes.com.hk

Website: www.falconeyes.com.hk

RoHS

CE



A 产品概述 Product Overview

LPS-150TD 是锐鹰新开发一款 COB 灯珠的双色温 LED 补光灯, 标准保荣接口, 与各种保荣灯光配件通用, 功率 150W, 2500K-9999K 色温可调, 无极调光, 内置 9 种场景模式: 闪电一、闪电二、电视、烛光、狗仔队、频闪、远近灯光、双闪、呼吸灯, 可手机 App 蓝牙控制灯光, 配标准罩一米照度达到 16700 lux, 适合于在线直播、人像拍摄、儿童拍摄、产品视频拍摄等场景应用, 体积小、亮度高、色温准、多特效是它的优点。

LPS-150TD is a bi-color LED studio light with COB LED chip newly developed by FalconEyes, it comes with standard Bownens bayonet to use with various light modifiers, power 150W, 2500K-9999K color temperature adjustable, stepless dimming, built-in 9 scenes effect mode: Lightning One, Lightning Two, TV, Candlelight, Paparazzi, Strobe, High/Low beam, Double Flash, Breathing Light, can be controlled by Bluetooth mobile phone App. Equipped with a standard reflector to increase illumination of 16700 LUX at 1 meter, suitable for live broadcast, portrait shooting, children shooting, product video shooting and other scene applications. LPS-150TD has a small portable housing, high brightness, accurate color temperature, and with built-in special lighting effect which are great for all application.

B 功能示意图 Panel Diagram



C 操作说明 Operating Instructions

CCT 色温控制

1. 打开电源开关后,按“Menu”主菜单键液晶屏显示如图1,按“Enter”确认键,选中亮度显示,再按向上或向下键调节灯具的亮度。

After you turn on the light, the display will show the screen as fig.1. Press Enter button to select the dimming and then press up & down button to adjust the dimming.

2. 如图1,按两次“Enter”确认键选中色温参数,再按向上或向下键调节灯光色温。

Fig.1, press the “Enter” key twice to select the color temperature parameter, and then press the up or down key to adjust the color temperature.

SCENE 特效模式

1. 按“Menu”主菜单键液晶屏显示如图2,按“Enter”确认键选中特效功能,再按向上或向下键选择灯具已预设的特效功能模式。

Press the Menu button to fig.2. Press Enter button to select the special effects and then press up & down button to adjust the special effects.

2. 如图2,按两次“Enter”确认键选中特效速度功能位置,再按向上或向下键调节灯具特效功能的闪烁速度。

Fig.2, press Enter button twice to select the speed and press up & down button to adjust the speed for the special effects.

3. 如图2,按三次“Enter”确认键选中特效亮度功能位置,再按向上或向下键调节灯具特效功能的亮度。

Fig.2, press Enter button three times to select the special effect dimming and press up & down button to adjust the dimming of special effects.

CH 频道、DMX 编码

1. 按“Menu”主菜单键液晶屏显示如图3,按“Enter”确认键选中频道,再按向上或向下键调节灯具的频道。

Press Menu button twice to fig.3. Press Enter button and select DMX channel, adjust the channel by up& down button.

2. 如图3,按两次“Enter”确认键选中风扇显示,再按向上或向下键开关灯具的风扇。

Fig.3, press Enter button twice to select the “Fan” and press the up & down button to on/off the fan.

* 散热风扇关闭后为保护设备,灯光亮度将被限制在 50% 以下。

* After the cooling fan is turned off, the brightness of the light will be limited to max. 50% to protect the equipment.

* 多灯同频道联动时,可通过 app 蓝牙控制其中一台灯联控其它同频道灯。

When multiple lights are linked to the same channel, one of the lights can be controlled in parallel via the Bluetooth APP to control other lights of the same channel.

BT_RESET 蓝牙连接重置

1. 按“Menu”主菜单键后液晶屏显示如图4,按“Enter”确认键选中“?”,再按向上键显示“YES”重置设备蓝牙连接。

Press “Menu” the LCD screen displays as shown in Figure 4. Press the “Enter” key to select “?”, and then press the up key to display “YES” to reset the device Bluetooth connection.



Figure 1



Figure 2



Figure 3



Figure 4

- | | |
|---------------------------------|----------------------------|
| ① 灯具温度
Lamp temperature | ② 灯光亮度
Dimming |
| ③ 色灯光温
Color temperature | ④ 灯光特效
Special effect |
| ⑤ 特效速度
Special effects speed | ⑥ 频道、DMX 编码
DMX Channel |
| ⑦ 风扇状态
Fan on/off display | ⑧ 蓝牙重置
Bluetooth reset |
| ⑨ 蓝牙ID
Bluetooth ID | |

D 技术参数 Specifications

数量 No. of LED bulbs LED	1pcs	
功率 Power	150W	
色温 Color Temperature	2500K-9999K	
照明 LUX (LUX)	裸灯	2500K: 9080 (0.5M) / 2070 (1M) / 536 (2M) / 260 (3M) 5600K: 20200 (0.5M) / 4550 (1M) / 1170 (2M) / 565 (3M)
	标准罩	2500K: 46700 (0.5M) / 7230 (1M) / 1640 (2M) / 720 (3M) 5600K: 108000 (0.5M) / 16700 (1M) / 3700 (2M) / 1610 (3M)
电压 Voltage	AC-100V-240V	
支撑座 Lamp Base	U架 U-bracket	
尺寸 Dimesion(LxWxH)	420x185x140mm	
照射角度 Beam Angle	64° (裸灯) 40° (标准罩)	
噪音分贝 Noise Level (dB)	47.5dB (0.2M) 40dB (0.5M)	
净重 Net Weight	1.98kg	
配件 Accessories Included	标准罩 Reflector , 电源线 Power cable	

E 使用注意事项 Attention

1. 请勿带电插拔：（不使用时应断开电源，即插入或拔出连接时应先 把电源开关关掉）

2. 非专业人士，请勿随便拆卸，否则后果自负。

3. 使用环境应保持干燥、通风注意防潮防水。

4. 产品表面有轻微的油渍及污渍请使用清洁布擦拭表面即可清除。

5. 请避免硬物将其划伤以至影响使用效果。

6. 凡是购买本产品的买家请根据灯背后电池座配用电池。

7. 使用产品时，请仔细阅读说明书。

1. Make sure the power is off after use.

2. Do NOT plug/unplug when the power is still connected.

3. Since there can be high voltage inside the unit, Do NOT open or repair the unit yourself. If there is any defect, please contact an experienced technician.

4. Keep the environment dry and ventilated when using the product. Do not leave or use the flash in humid or dusty environment.

5. For best performance of LEDs, maintain cleanliness of LEDs by wiping the surface softly with clean cloth.

6. Do NOT apply pressure to the product.

7. Only use the specific Li-ion camcorder batteries according to the model of the battery holder on the rear panel

8. Read this manual carefully before using the product.



DeSal Lite+



灯光无线控制App

Lighting Remote Control App



Download on the
App Store

iOS


搜索“DESAL Lite+”下载安装
Search "DESAL Lite+" on App
Store to download



Android
HarmonyOS

请手机浏览器扫描二维码下载安装
Use your scan tool scan the QR code
to download

APP connected lamps APP连接灯具

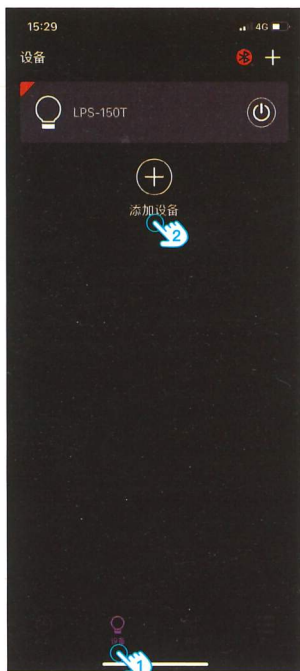

打开灯具, 打开手机蓝牙, 打开“DESAL Lite+”App

Turn on the device, turn on Bluetooth of the phone, and open the "DESAL Lite+" App



导航栏选择“设备”

Select "Device" in the navigation bar



点击“添加设备”

click "Add Device"




自动扫描到可连接灯具, 点击扫描到的灯具右侧 ⊕ 连接

Automatically scan devices, click on the right side of the scanned device ⊕ connect

* 如 APP 未找到需连接的灯具, 请重置灯具的蓝牙连接。

If the APP does not find the lamp to be connected, please reset the Bluetooth connection of the lamp.

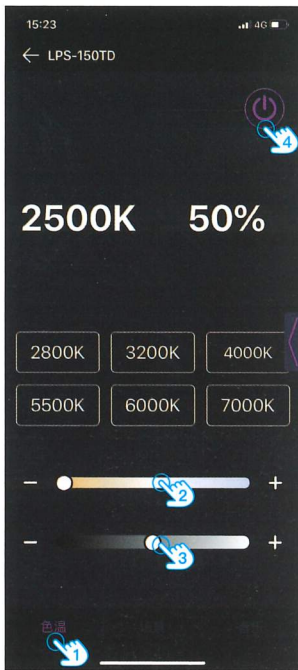

Brightness control 亮度控制

在“最近”、“设备”、“群组”页选择需要使用的设备或群组
Select the device or group to be used on the "Recent", "Device" and "Group" pages

- 1 导航栏选择“亮度”进入亮度控制页
Select "Brightness" in the navigation bar to enter the brightness control page
- 2 点击或滑动色温控制条调节灯光色温
Click or slide the color temperature control bar to adjust the color temperature
- 3 点击或滑动亮度控制条调节灯光亮度
Click or slide the brightness control bar to adjust the brightness
- 4 点击打开 / 关闭灯光
Click to turn on/off the light



Light Scene Effect 灯光场景特效

在“最近”、“设备”、“群组”页选择需要使用的设备或群组
Select the device or group to be used on the "Recent", "Device" and "Group" pages

- 1 导航栏选择“场景”进入亮度控制页
Select "Scene" in the navigation bar to enter the brightness control page
- 2 点击或滑动亮度控制条调节灯光亮度
Click or slide the brightness control bar to adjust the brightness
- 3 点击速度控制条调节灯光变化速度
Click the speed control bar to adjust the speed of light changes
- 4 点选灯光特效
Click on lighting scene effects
- 5 点击打开 / 关闭灯光
Click to turn on/off the light

* APP 仅能控制关闭灯光亮度, 灯具电源开关需在机身控制
APP can only turn off the light, switching off the lamp will need to turn off physically on the power switch.